

## 180 Watt MONO-CRYSTALLINE SOLAR PANEL

### Features

- High conversion efficiency based on leading innovative photovoltaic technologies
- High reliability with guaranteed  $\pm 3\%$  power output tolerance, ensuring return on investment
- Withstands high wind-pressure and snow load (passed IEC 5400Pa mechanical loading test), and extreme temperature variations

### Quality and Safety

- 25-year power output transferable warranty
- Rigorous quality control meeting the highest international standards
- ISO 9001:2000 (Quality Management System) and ISO 14001:2004 (Environmental Management System) certified factories manufacturing world class products
- IEC61215, IEC61730, conformity to CE

### Recommended Applications


- Residential roof top systems
- On-grid utility systems
- On-grid commercial systems



Unique Suntech Back Surface Field (BSF) structure and anti-reflective coating increase cell conversion efficiency



Special design on drainage holes and rigid construction prevents frame from deforming or breaking due to freezing weather and other forces



Advanced cell texturing and passivation processes improve module low light irradiance performance and provide more field power output




Suntech was named Frost and Sullivan's 2008 Solar Energy Development Company of the Year

### Electrical Characteristics

Characteristics	STP180S-24/Ac	STP175S-24/Ac	STP170S-24/Ac
Open - Circuit Voltage (Voc)	44.8V	44.7V	44.4V
Optimum Operating Voltage (Vmp)	36.0V	35.8V	35.6V
Short - Circuit Current (Isc)	5.29A	5.23A	5.15A
Optimum Operating Current (Imp)	5.0A	4.9A	4.8A
Maximum Power at STC (Pmax)	180Wp	175Wp	170Wp
Operating Temperature	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Maximum System Voltage	1000V DC	1000V DC	1000V DC
Maximum Series Fuse Rating	8A	8A	8A
Power Tolerance	±3 %	±3 %	±3 %

STC: Irradiance 1000W/m<sup>2</sup>, Module temperature 25°C, AM=1.5

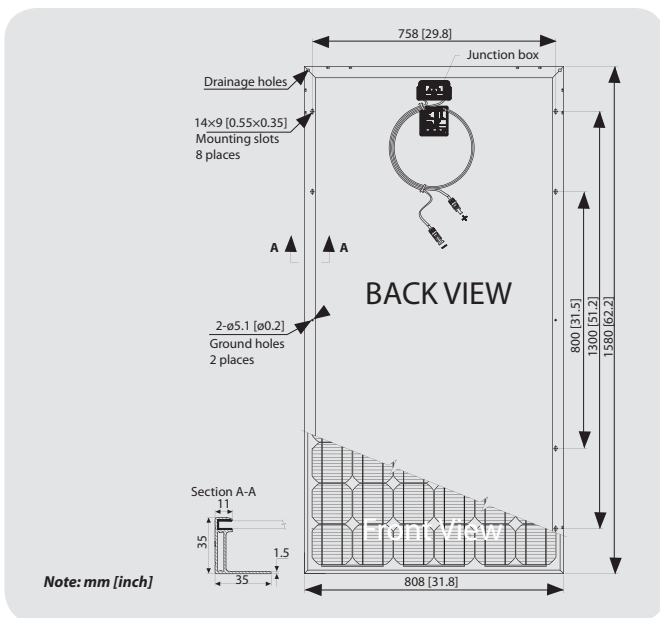


### Mechanical Characteristics

Solar Cell	Mono-crystalline 125x125mm (5inch)
No. of Cells	72 (6x12)
Dimensions	1580x808x35mm (62.2x31.8x1.4inch)
Weight	15.5kg (34.1lbs.)
Front Glass	3.2 mm (0.13inch) tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP65 rated
Output Cables	LAPP 4.0mm <sup>2</sup> (0.006inch <sup>2</sup> ), asymmetrical lengths (-) 1200mm(47.2inch) and (+)800mm(31.5inch), MC Plug Type IV connectors


### Temperature Coefficients

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.48 %/°C
Temperature Coefficient of Voc	-0.34 %/°C
Temperature Coefficient of Isc	0.037 %/°C

Current-Voltage & Power-Voltage Curve (175W)

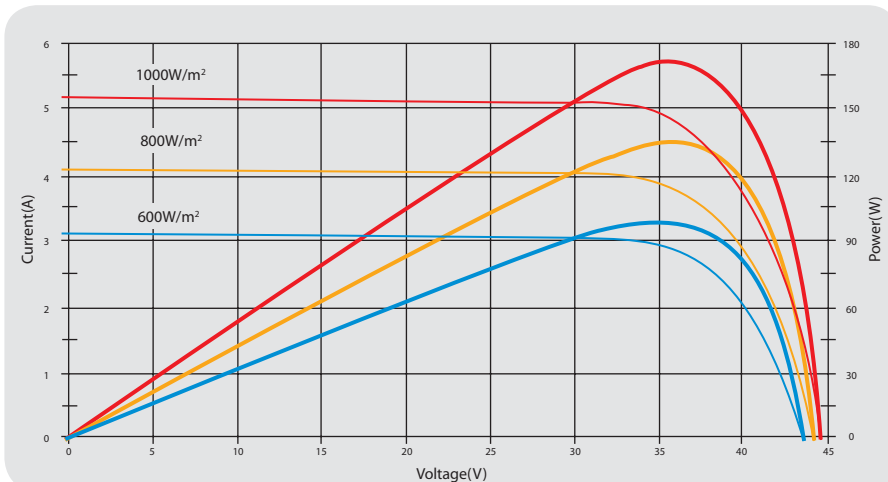

Temperature Dependence of Isc, Voc, Pmax

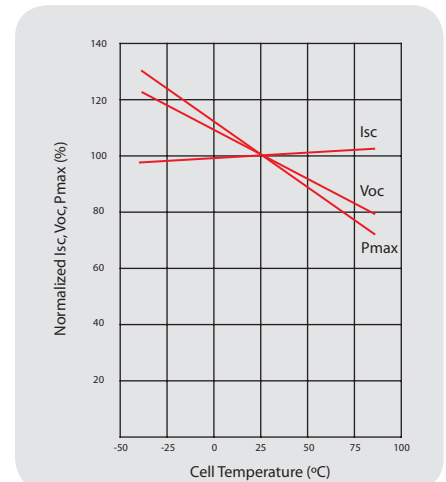

Specifications are subjected to change without further notice